
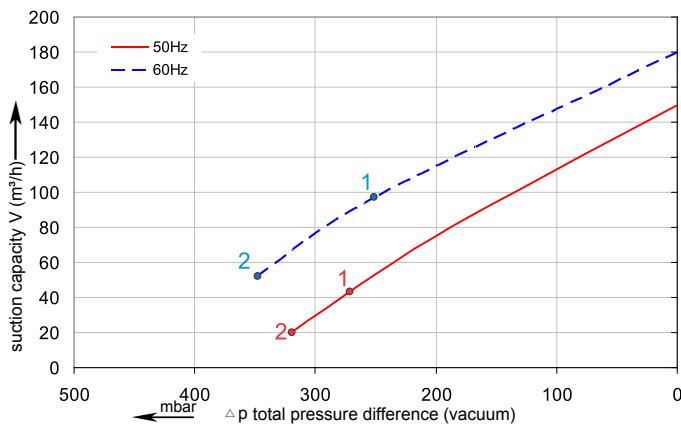
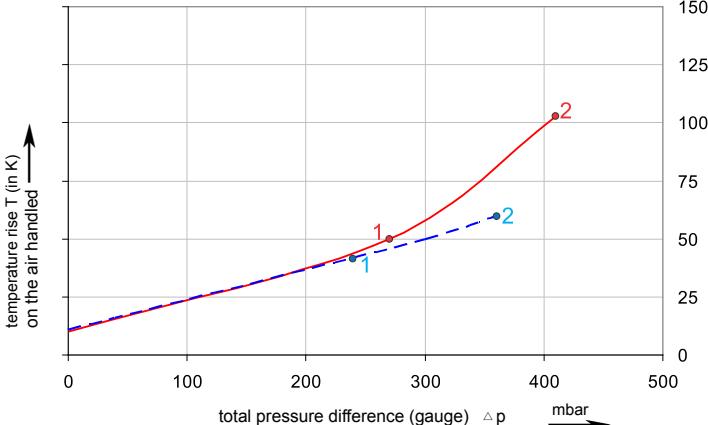
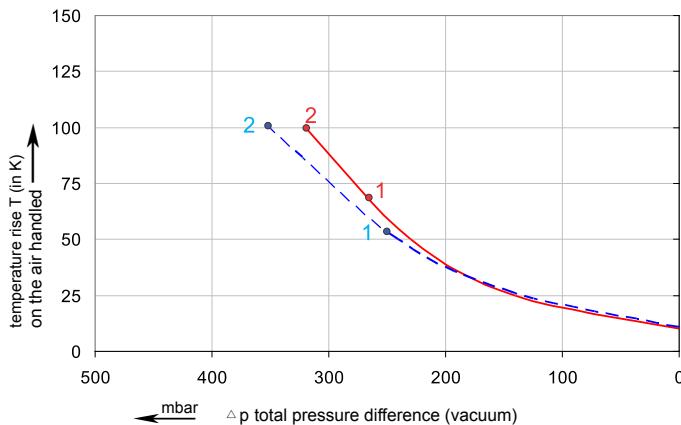
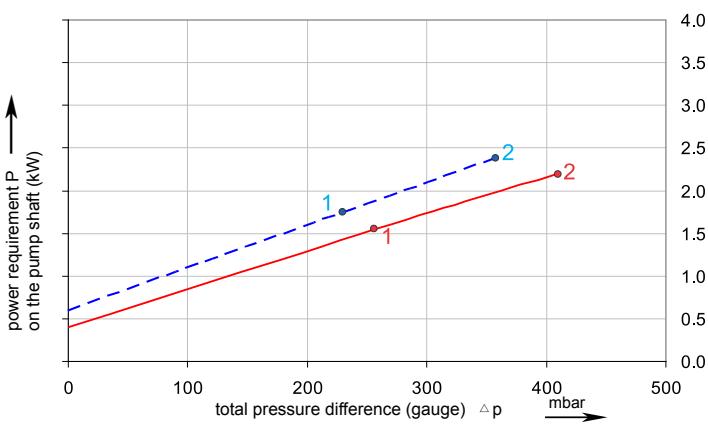
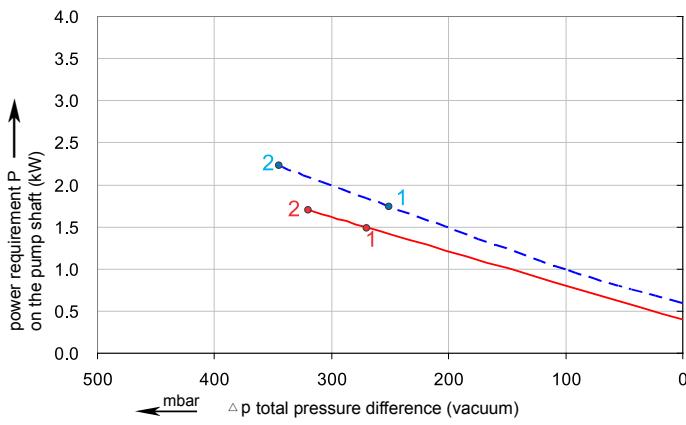


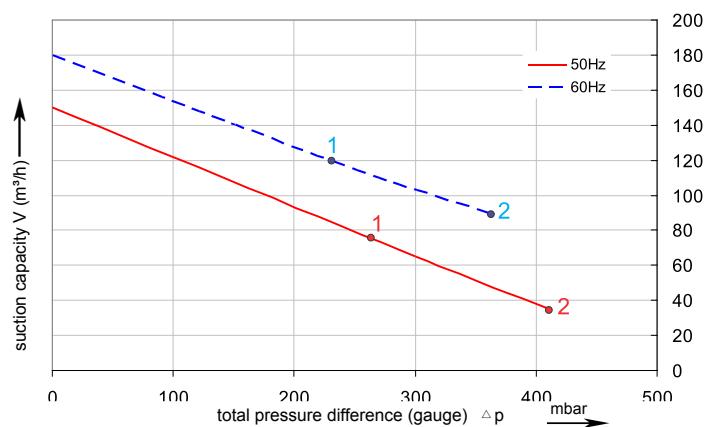

# Data sheet 2RB 420

## Side channel blower with IE2-motors

**Performance curve for Vacuum pump****Performance curve for Compressor**

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.  
The total pressure differences are valid for suction and ambient temperatures up to 25 °C.  
For other conditions please confer with us.

Each G-2RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55.

## Selection and ordering data

### Type 2RB420

Curve No.	Order No.	Frequency Hz	Rated power kW	Input voltage V	Input current A	Vacuum mbar	Compressor mbar	Sound pressure level dB(A)	Weight ca. kg
<b>3~ 50/60 Hz IP55 insulation material class F ,UL 1004-1</b>									
1	2RB420-7HT36	50	1.50	200 - 260 D / 350 - 450 Y	5.70D/3.30Y	-270	270	66	24
		60	1.75	230 - 290 D / 400 - 500 Y	5.70D /3.30Y	-250	230	69	24
2	2RB420-7HT46	50	2.20	200 - 260 D / 350 - 450 Y	8.10D/4.60Y	-320	410	66	27
		60	2.55	230 - 290 D / 400 - 500 Y	8.00D /4.60Y	-350	360	69	27

1) Relief valves available for limiting differential pressure.

2) Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance  $\pm 3$  dB(A).

All 2RB fulfil the 2006/42/EC(machinery)and 2006/95/EC(low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 /-30(IEC 60034) and thermal class F.

The voltage tolerance is  $\pm 5\%$ .

The frequency tolerance is  $\pm 2\%$  maximum.

Other voltage ranges						
50 Hz	50 Hz Voltage range	60 Hz Voltage range	86 Hz (5000 rpm)	100 Hz (6000 rpm)	2RB...-7. □ . □	
<b>3~IE2/ (EFF I)</b>						
200 V D/345 V Y	180-240 V D /310-415 V Y	200...275 V D/345...480 V Y	-----	400 V D	T	1
500 V Y	450-550 V Y	520...600 V Y	-----	-----	T	3
230 V D/400 V Y	200-260 V D /350-450 V Y	230...290 V D/400...500 V Y	400 V D	-----	T	6
400 V D/690 V Y	350-450 V D /610-725 V Y	400...500 V D/690...725 V Y	-----	-----	T	7

4) Performance can differ if standard motors are used. Please refer to corresponding data sheets.



Changes in particular the quoted performance curve, data and weights without prior notice. The figures are without obligations.

ZHEJIANG GREENCO INDUSTRY CO.,LTD

Add:danya industrial zone.zeguo.wenling zhejiang China  
P.C:317523  
Tel:0086-576-86428999  
Fax:0086-576-86409555  
E-mail:greenco@greenco.cn  
Http://www.greenco.cn